



TECHNICAL DATA SHEET

25 - 03 - 2010

SDEV-FICA 88R2

Designation	Smoove 1 IN RTS
Reference	1810873 (pure shine) 1810902 (black shine) 1810904 (silver shine) 1810905 (red light)
Range	RTS

FUNCTIONS

- Sensitive Command : Up, My, Down
- Setting with RTS ergonomic
- Composition: 1 module, 1 Mounting plate
DIN 50x50, 1 spacer


- Icon Battery life time
- Switch ON/OFF



Smoove 1 Pure Shine



Smoove 1 Black Shine



Smoove 1 Silver Shine



Smoove 1 Red Light




Support mural



TECHNICAL SPECIFICATIONS

Box	Material Color	ABS & PC Pure Shine, Black Shine, Silver Shine, Red Lisa
	Size Protection factor against solid & splashproof	Module 50 x 50 x 10 mm IP 30
Battery	Voltage Type Number	3V CR 2430 x1
Battery lifetime (at ambient temperature in typical conditions)		42 months
Radio frequency EIRP (Equivalent Isotropically Radiated Power) Modulation Type		433.42MHz ± 100kHz -4 dBm or 0.4mW ASK Type A1
Protocol Antenna		RTS U56 Integrated
Temperature range	Storing Working	-30°C / +70°C 0°C / +60°C
Drop test		Installation: at 0°C 1/face (height : 1,2m) Using: at 20°C 1/face (height : 1,2m)
Wear resistivity Cleaning products resistivity		50 250 cycles
Weight Standard (CE)		24g
<i>Safety of the user : EN EN60950-1 : 2006</i>		
<i>Health of the user : EN50371 : 2002</i>		
<i>Electromagnetic compatibility : EN61000-6-1: 2007_EN61000-6-3 : 2007_EN301 489-3 V1.4.1 : 2002_EN301 489-1 V1.8.1 : 2008</i>		
<i>Radio Spectrum : EN300220-2 V2.1.2 : 2007_EN300220-1 V2.1.1 : 2006</i>		

DESCRIPTION

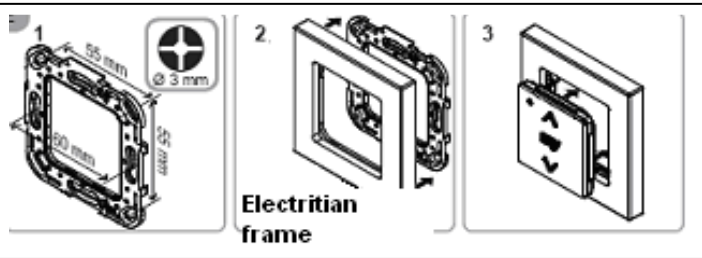

Red cover for RTS technology

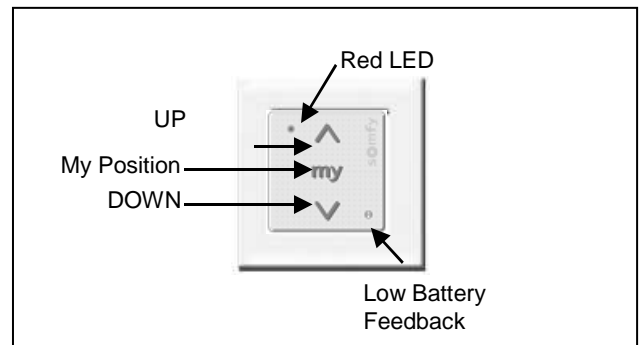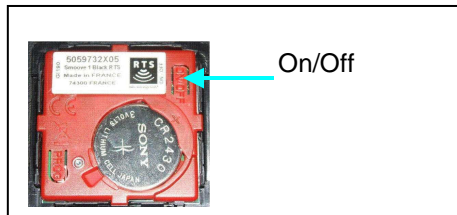


COMPATIBILITIES

Actuators :

- All RTS actuators

INSTALLATION

Switch ON/OFF

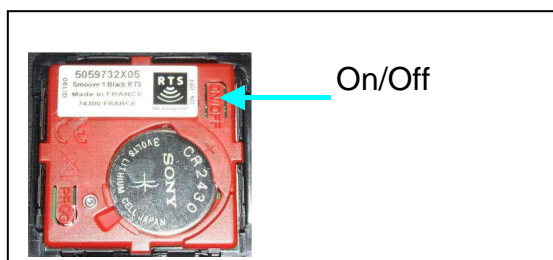

- Press On/Off button for wake up the sensitive pad.

Remark

The prog button is available when the module is OFF

Frame compatibility with GERMAN Market

Busch-Jaeger	Carat	X	Jung	AS 500	
	Impuls	Not possible		AS Antibakteriell	X
	Solo	X		AS Universal	?
	Alpha Exclusive	X		A 500	X
	Alpha Nea	X		A Plus	X
	Future	X		CD 500	X
	Future linear	X		CD Universal	X
	Reflex SI	X		CD Plus	X
	Reflex SI linear	?		SL 500	?
	Duro 2000 SI	?		LS 990	X
	Duro 2000 SI linear	?		LS Plus	Not possible
	Triton	?		FD 990	?
	Gira	Standard 55		X	Hager
E2			Kallysto.stil	Not possible	
System 55		X	Kallysto.art	Not possible	
Event			Merten	M1	X
System 55		X		Atelier	X
Esprit				Epoca	?
System 55		X		Octocolor	X
Profil		?		M-Arc	X
System 55		?		M-Plan	X
Flächenschalter		X		M-Plan II	X
S-Classic		Not possible		M-Smart	X
S-Color		Not possible		M-Plan Echtglas	X
Edelstahl Serie 20		?		M-Star	X
Edelstahl Serie 21		?		Artec	?
TX_44		Not possible		Antik	X
E22	?	Tracent		X	
E22 thermoplast	?	Eiso		Riva	?
F100	?			Scala	?
Berker	K1		X	Fashion	?
	K5		X	Fashion bruchfest	?
	B1		X	Novia	?
	B3		X	Classic	?
	B7 Glas		X	Arezzo	?
	S1		X	Senso	?
	Modul 2		X	Komplett	?
	Serie 1930		?	Legrand (Gmbh)	Creo
	Glasserie	?	Tenara		?
	Palazzo	?	Tenara Metall		?
	ArSYS	X	Structura		?
	Twinpoint	?			

BE – R&D
F. GIGOUT

QUALITY
G. BRUNEAU

MARKETING
C.DENIAU