
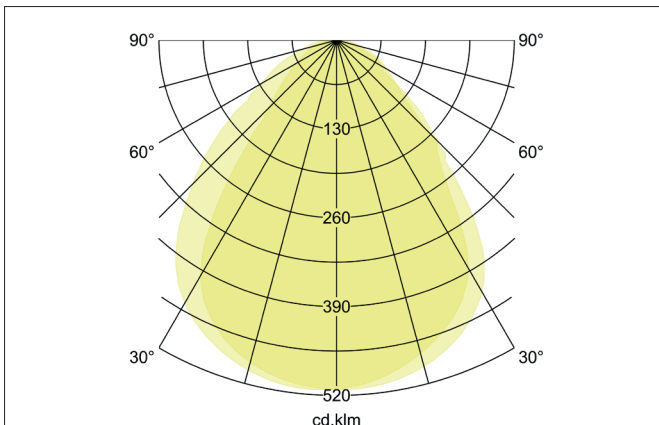


**CEBU LED panel 1,545 x 308 mm TunableWhite MP DALI-2 DT-8**  
Article no. 32074074

Light.  
For Generations.

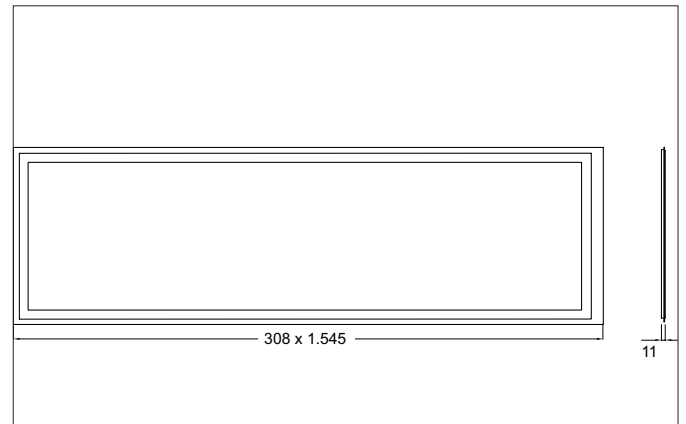

#### Tender

LED panel 1,545 x 308 mm TunableWhite MP DALI-2 DT-8, Rectangular. Recessed luminaire for ceilings with visible mounting rails. Ceiling cut-out L x W 1545 x 308 mm, Installation depth 11 mm, Length 1.545 mm, Width 308 mm, Weight 3,600 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, microprismatic cover. Luminous flux 5.600 lm, UGR < 19, Power 1 x 40 W, Light colour warm white to daylight white, Correlated color temperature (CCT) 2.700 - 6.500 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 100.000 h, Rated life time L80/B10 at 25 °C: 50.000 h, Housing material: Aluminium / PMMA, Colour: TunableWhite, Permissible ambient temperature (ta): -20°C to +45°C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK04 .With electronic driver, DALI-2 dimmable.

**CEBU LED panel 1,545 x 308 mm TunableWhite MP DALI-2 DT-8**

Article no. 32074074

Light.  
For Generations.

Article data	
Article no.	32074074
GTIN	4251433999850
Series name	CEBU
Short description	LED panel 1,545 x 308 mm TunableWhite MP DALI-2 DT-8
Material	Aluminium / PMMA
Colour	TunableWhite
Shape	Rectangular
Built-in width	308 mm
Built-in length	1545 mm
Installation depth	11 mm
Length	1,545 mm
Width	308 mm
Hight	11 mm
Scope of delivery	incl. Multilumen DALI-2 DT-8 control gear. 500 mA; 700 mA; 900 mA; 1,050 mA
Weight	3.600 kg

Lighting technology	
Colour temperature	2.700 K - 6.500 K
Light colour	White
Color Temperature 1	2,700 K
Color Temperature 2	6,500 K
Light output	Direct
Luminous flux	5,600 lm
Luminous flux 1	2,800 lm
Luminous flux 2	2,800 lm
System efficiency	124 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risk group according to EN 62778	RG0
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
System output	45 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP20
Ambient temperature	-20°C bis +45°C
Dimmable	Yes
Control	DALI-2 , PUSH-Dimm, DALI-DT8
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	100,000 h
Rated life time L80/B10 at 25 °C	50.000 h





**CEBU LED panel 1,545 x 308 mm TunableWhite MP DALI-2 DT-8**

Article no. 32074074

Light.  
For Generations.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK04
stamp	UKCA
Further references	No cover with thermal insulation material
Material cover	Plastic, microprismatic
Suitable for through-wiring	Yes

Packing data	
Gross weight	4 kg
Length of packaging	1,570 mm
Packaging width	35 mm
Packaging height	340 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Accessories	
	Article no.: 81032071 Installation frame 1-piece, 1,625 x 388 x 30 mm, white  Dimensions: 1,652 mm x 388 mm x 30 mm
	Article no.: 81032072 Mounting frame 4-piece, 1,564 x 327 x 50 mm, white  Dimensions: 1,564 mm x 327 mm x 50 mm
	Article no.: 81032069 Y-rope suspension set of 1 300/308mm
	Article no.: 00532900 Installation spring set of 4 for LED panel