



Article no. 32051074





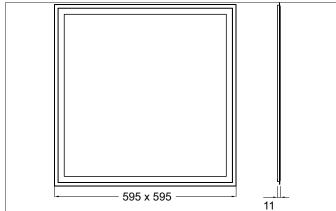

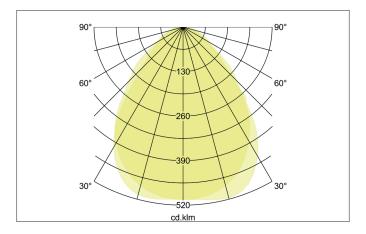

### Tende

Square LED recessed panel 595 x 595 mm, microprismatic cover, UGR<19, DALI dimmable, recessed luminaire for ceilings with visible trunking. Ceiling cut-out L x W 577 x 577 mm installation depth 40 mm, length 595 mm, width 595 mm, weight 2.700 kg, with rotationally symmetrical deep-wide beam light distribution. Plastic microprismatic cover, rated luminous flux 4,200 lm, UGR < 19, rated wattage 1 x 28 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 80, service life L70/B10 at 25 °C: 110.000 h, service life L70/B50 at 25 °C: 125,000 h, service life L80/B10 at 25 °C: 78,000 h, service life L80/B50 at 25 °C: 100,000 h, housing material: aluminum / PMMA, color: white, permissible ambient temperature (ta): -20 °C to +45 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK04. With electronic control gear, DALI-2, PUSH-Dimm dimmable. The luminaire is also ENEC-certified by an independent testing body.



Article no. 32051074

Article data	
Article no.	32051074
GTIN	4251433998174
Series name	PINOS
Short description	LED panel 595 x 595 mm MP DALI-2
Material	Aluminium / PMMA
Colour	White
Shape	Square
Length	595 mm
Width	595 mm
Built-in length	577 mm
Built-in width	577 mm
Installation depth	40 mm
Hight	11 mm
Scope of delivery	incl. multilumen DALI-2 / PUSH-dimm driver.
	300 mA bis 1.050 mA (in steps of 50)
Weight	2.700 kg
stamp	ENEC
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	4,200 lm
System efficiency	131 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risk group according to EN 62778	RG0
Adjustable color temperature	No



Article no. 32051074

Operating technology of the luminaire	
System output	32 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	
Degree of protection	IP20
Ambient temperature	-20°C to +45°C
Dimmable	Yes
Control	DALI-2, PUSH-Dimm
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	125,000 h
Rated life time L80/B10 at 25 °C	78.000 h
Rated life time L80/B50 at 25 °C	100.000 h
Rated life time L90/B10 at 25 °C	30.000 h
Energy efficiency class	nicht erforderlich
max. no. lights on B10 A	37
max. no. lights on B16 A	59
max. no. lights on C10 A	37
max. no. lights on C16 A	59

Operating technology of the luminaire	
Hight	11 mm
Lamp holder	Without fitting
Power	32 W
Voltage type	DC
Current	1.050 mA
Lamp	LED
Protection class	
Degree of protection	IP40
Rated life time L70/B50 at 25 °C	100,000 h
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK04
Further references	No cover with thermal insulation material
Material cover	Plastic, microprismatic
Suitable for through-wiring	Yes



Article no. 32051074

Packing data	
Gross weight	3 kg
Length of packaging	640 mm
Packaging width	635 mm
Packaging hight	35 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

Optional accessories

Article no.: 81032050

Installation frame 1-piece, 655 x 655 x 30 mm, white

Dimensions: 650 mm x 650 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_81032050\_2021\_DE.pdf

Article no.: 81032051

Mounting frame, 4-part, 620 x 620 x 50 mm, white

Dimensions: 610 mm x 610 mm x 50 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_81032051\_2021\_DE.pdf

Article no.: 81032068

Y-rope suspension set of 1 600/620mm

Dimensions: 2,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_81032068\_2021\_DE.pdf

Article no.: 00532900

Installation spring set of 4 for LED panel

https://www.brumberg.com/fileadmin/products/Datenblatt\_00532900\_2021\_DE.pdf

Article no.: 17840010

LED driver 800 mA - 1,050 mA, on/off, for through-wiring

Leistung: 42 W

Dimensions: 170 mm x 65 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17840010 2021 DE.pdf

Article no.: 17843010

LED driver 1,050 mA, trailing edge dimmable

Leistung: 39,9 W

Dimensions: 142.3 mm x 31.5 mm x 60 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_17843010\_2021\_DE.pdf

Article no.: 17844010

LED driver 900 mA - 1,050 mA, 1-10 V dimmable

Leistung: 44,1 W

Dimensions: 180 mm x 40 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17844010 2021 DE.pdf

Article no.: 81078055

Conversion kit 3 h emergency light to LED panel AGGY

Leistung: 3 W

https://www.brumberg.com/fileadmin/products/Datenblatt\_81078055\_2021\_DE.pdf