
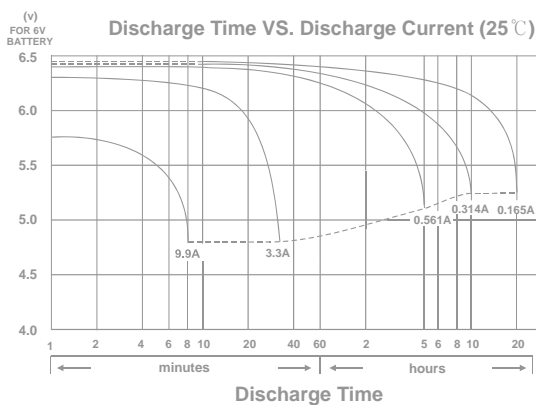
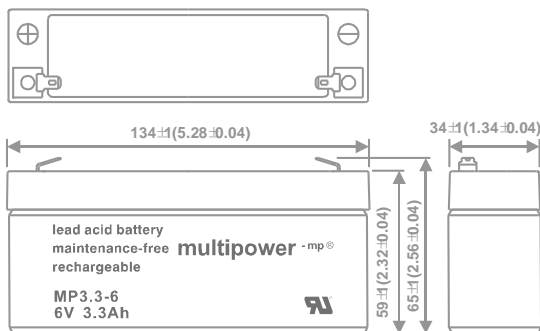


RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION



MP3,3-6

Nominal Voltage (V) 6V

Nominal Capacity

20 hour rate	(0.165A to 5.25V)	3.30Ah
10 hour rate	(0.314A to 5.25V)	3.14Ah
5 hour rate	(0.561A to 5.1V)	2.81Ah
1 C	(3.3A to 4.8V)	1.87Ah
3 C	(9.9A to 4.8V)	1.32Ah

Weight Approx. 670g (1.48lbs)

Internal Resistance (at 1KHz) Approx. 18 mΩ

Maximum Discharge Current for

5 seconds: 49.5A

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 7.35V to 7.40V

Coefficient -5.0mv/°C/cell

Maximum Charging Current: 0.99A

Standby use:

Float Charging Voltage 6.75V to 6.90V

Coefficient -3.0mv/°C/cell

Operating Temperature Range

Charge -15°C (5°F) to 40°C (104°F)

Discharge -15°C (5°F) to 50°C (122°F)

Storage -15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month 92%

3 month 90%

6 month 80%

Case Material

(UL94 HB flame retardant case / cover)


ABS

Terminal


F1 (Faston Tab 187)

CHARACTERISTIC


Effect of Temperature on Capacity 25°C(77°F)

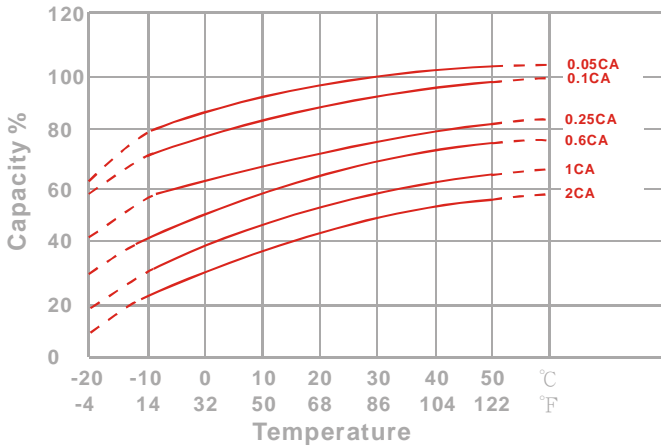

Capacity Retention Characteristic

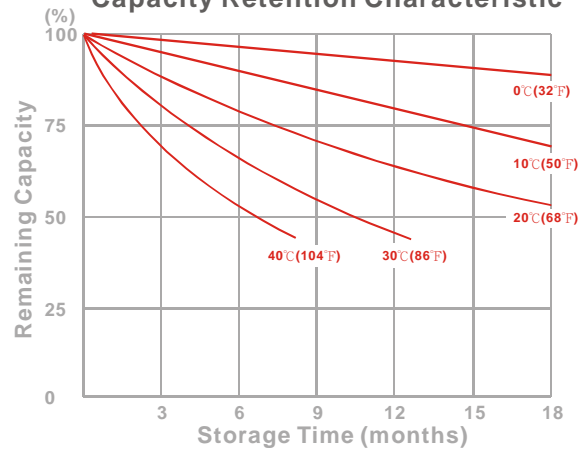

Trickle (or float) Service Life

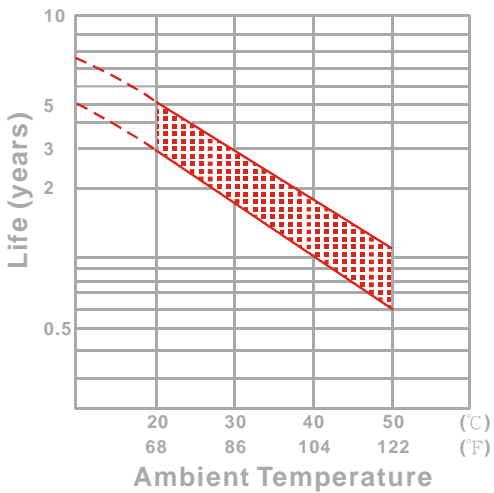

Cycle Service Life

