


LED-Band 20 W/m mit RGBW 5050-LEDs

LED strip 20 W/m with RGBW 5050-LEDs

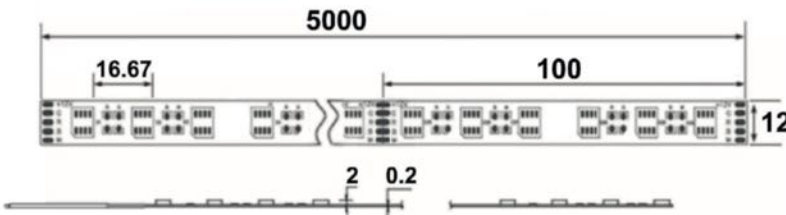

		kaltweiß cool white	neutralweiß neutral white	warmweiß warm white	extraweiß extra white
Artikelnummer	Part no.	808200	808201	808202	808203
Typ	Type	OS24-20-RGB865	OS24-20-RGB840	OS24-20-RGB830	OS24-20-RGB827
Leistung max.	Power max.	20 W/m			
Lichtstrom typ.	Luminous flux typ.	990 lm/m	980 lm/m	970 lm/m	960 lm/m
Farbtemperatur weiß	Colour temperature white	6400 K	4050 K	3000 K	2750 K
Farbwiedergabeindex weiß	Colour rendering index white	80			
Ausstrahlwinkel	Viewing angle	120 °			
Max. Bemessungstemp. (ts)	Rated max. tempe. (ts)	60 °C			
Abmessungen	Dimensions	5000 x 12 x 2 mm			
Anzahl LEDs	Number of LEDs	60 /m			
Nenn-Eingangsspannung	Nominal input voltage	24 Vdc			
Länge einer Einheit	Length of a unit	100 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	5 m			

- 5 m flexibles LED-Band mit RGBW SMD-LEDs für Grundbeleuchtung und Farbeffekte
- Selbstklebend
- Trennbar zwischen den Einheiten, mit Lötpads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Lichtquelle speziell mit hochwertigem, farblich abstimmbarem Licht

- 5 m flexible LED strip with RGBW SMD-LEDs for general lighting and colour effects
- Self-adhesive
- Divisible between units, with solder pads
- Must be installed on a heat conductive surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- Light source specifically with high-quality colour-tuneable light