


LED-Band 24 W/m mit RGBTW 5050-LEDs

LED strip 24 W/m with RGBTW 5050-LEDs

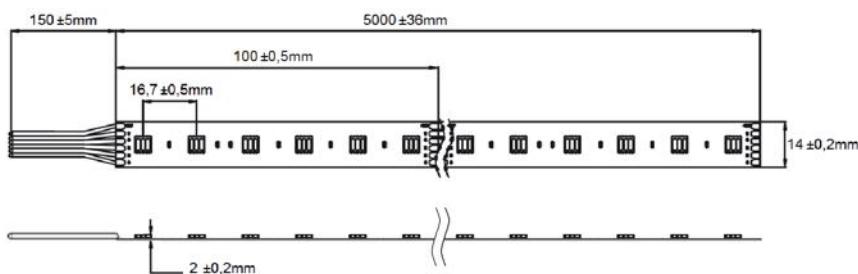

CE		Gesamt Total	CW CW	WW WW
Artikelnummer	Part no.	808382		
Typ	Type	0S24-24-RGB924965		
Leistung max.	Power max.	24 W/m		
Lichtstrom typ	Luminous flux typ	1100 lm/m		
Wellenlnge	Wave length	5500 K*	6500 K	2400 K
Farbwiedergebeindex	Colour rendering index		90	90
Ausstrahlwinkel	Viewing angle		120 °	
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)		60 ° C	
Abmessung	Dimensions	5000 x 14 x 2 mm		
Anzahl LEDs	Number of LEDs	60 /m		
Nenn-Eingangsspannung	Nominal input voltage	24 Vdc		
Lnge einer Einheit	Length of a unit	100 mm		
Max. Lnge nach Einspeisung	Max. length after feed-in	5 m		

- 5 m flexibles LED-Band mit RGBTW LEDs für Grundbeleuchtung und Farbeffekte
 - Selbstklebend
 - Trennbar zwischen den Einheiten, mit Lötpads
 - Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
 - Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
 - Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
 - Mit 15 cm Kabel
 - Lichtquelle speziell mit hochwertigem, farblich abstimmbarem Licht
 - 5 m flexible LED strip with RGBTW LEDs for general lighting and colour effects
 - Self-adhesive
 - Divisible between units, with solder pads
 - Must be installed on a heat conductive surface for cooling purposes
 - If installed onto a surface that conducts electricity, please ensure that the connections are insulated
 - Bending radius in places with components min. 50 mm; attach without pressure
 - With 15 cm cable
 - Light source specifically with high-quality colour-tunable light

* bei RGB und TW auf 100 %

* with RGB and TW at 100 %