



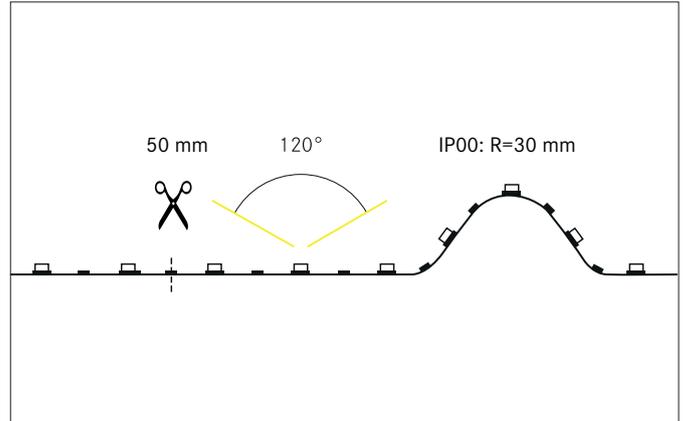

QUALITYFLEX ONE TRINITY LED flexible strip, 5 m, CRI > 90, 5 W or 9 W or 12 W / m, IP00
Article no. 38233027

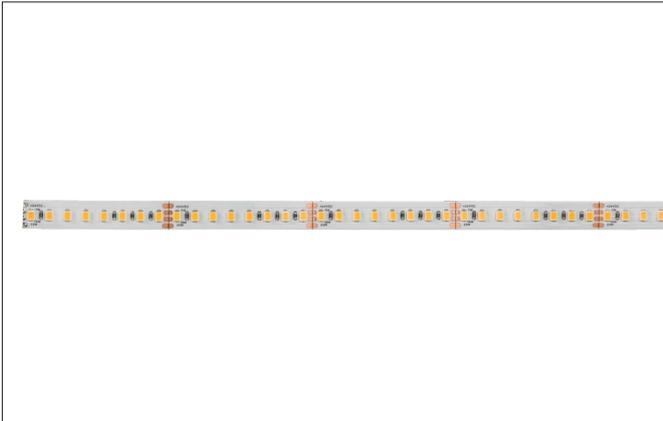

Tender
LED flexible strip, 5 m, CRI > 90, 5 W or 9 W or 12 W / m, IP00, white, Light colour: white, 2.700K, CRI > 95. Length: 5000 mm . Lamp power per meter: 12.0 W/m, Luminous flux per meter: 1300.0 lm/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 160 LEDs per meter, Chip distance (Short Pitch) : 6,25mm. For individual application, the LED flex board can be used all 50 mm be cut back. The maximum system length of 5.000 mm must not be exceeded with one feed-in.

Product Benefits

- 3 in 1, three power levels selectable ex works.
- 5 watts or 9 watts or 12 watts per meter.
- Suitable for indoor applications (IP00).
- Up to 143 lm per watt.
- Length 5,000 mm with a pitch of 50 mm.
- Available in 2,700 K, 3,000 K, and 4,000 K.
- Dimmable with appropriate accessories.


QUALITYFLEX ONE TRINITY LED flexible strip, 5 m, CRI > 90, 5 W or 9 W or 12 W / m, IP00

Article no. 38233027

Article data	
Article no.	38233027
GTIN	4255752525509
Series name	QUALITYFLEX ONE TRINITY
Short description	LED flexible strip, 5 m, CRI > 90, 5 W or 9 W or 12 W / m, IP00
Colour	white
Length	5,000 mm
Width	10 mm
Hight	2 mm
Scope of delivery	inkl. 1 x Montageanleitung, 5 x Kennzeichnungsetiketten
Weight	0.088 kg
Length of the connection line	125 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	2.700 K
Light colour	white
Luminous flux per meter	1,300 lm/m
Luminous flux	560 - 1,300 lm/m
Luminous flux 1	560 lm/m
Luminous flux 2	980 lm/m
Luminous flux 3	1,300 lm/m
System efficiency	108 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 95
Beam angle	120°
Adjustable color temperature	No

Operating technology of the luminaire	
System output	60 W
Lamp power per meter	12 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP00
Ambient temperature	-10°C up to +40°C
Dimmable	Yes
Wire number	4
Control	Depending on driver
Length of the connection line	125 mm
Cable assignment	schwarz = + pol blau = - pol, 5 Watt rot = - pol, 9 Watt grün = - pol, 12 Watt
Design of the connecting cable	beidseitig
Bulb change possible	No
Rated life time L70/B50 at 25 °C	60,000 h



**QUALITYFLEX ONE TRINITY LED flexible strip, 5 m, CRI > 90, 5 W
or 9 W or 12 W / m, IP00**
Article no. 38233027

Operating technology of QualityFlex	
Power per meter	12 W/m
Short Pitch	6.25 mm
Number of lamps per meter	160 Qty
Length of individual sections	50 mm
Smallest bend radius	30 mm
Length	5,000 mm
Maximum module length	5,000 mm
Circuit type	Parallel conduction
LED Type	3528 LED

Packing data	
Gross weight	0.156 kg
Length of packaging	215 mm
Packaging width	245 mm
Packaging height	20 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Compatible Driver						
Article no.		Power	Control	Length	Width	Hight
17206000	1 W	20 W	1-10 V	146 mm	55 mm	19 mm
17207000	1 W	30 W	on/off	160 mm	50 mm	22 mm
17214000	1 W	7.2 W	on/off	68 mm	35 mm	21 mm
17223000	1 W	75 W	on/off	185 mm	60 mm	31 mm
17224000	1 W	100 W	on/off	199 mm	63 mm	36 mm
17225000	1 W	150 W	on/off	219 mm	63 mm	36 mm
17226000	1 W	240 W	on/off	244 mm	71 mm	38 mm
17227000	1 W	320 W	on/off	252 mm	90 mm	44 mm
17228000	1 W	480 W	on/off	262 mm	125 mm	44 mm
17230000	5 W	30 W	Trailing-edge phase	145 mm	50 mm	22 mm
17231000	12 W	75 W	Trailing-edge phase	185 mm	60 mm	31 mm
17232000	12 W	120 W	Trailing-edge phase	223 mm	64 mm	32 mm
17340000	1.5 W	30 W	on/off	135 mm	36 mm	25 mm
17341000	3 W	60 W	on/off	151.5 mm	40.2 mm	31 mm
17342000	6 W	120 W	on/off	253.2 mm	42.5 mm	31 mm
17343000	7.5 W	150 W	on/off	253.2 mm	42.5 mm	31 mm
17250000	1 W	45 W	DALI-2	187 mm	45 mm	31 mm
17251000	1 W	80 W	DALI-2	290 mm	45 mm	31 mm
17252000	1 W	150 W	DALI-2	290 mm	45 mm	31 mm
17260000	1 W	150 W	on/off	105 mm	90 mm	59 mm


**QUALITYFLEX ONE TRINITY LED flexible strip, 5 m, CRI > 90, 5 W
or 9 W or 12 W / m, IP00**

Article no. 38233027

Compatible Controller						
Article no.		Power	Control	Length	Width	Hight
17502000	1 W	120 W	DALI	183 mm	33 mm	23 mm
18151000	1 W	240 W	KNX	170 mm	59 mm	30 mm
18152000	1 W	240 W	DALI-DT6	170 mm	59 mm	30 mm
18153000	1 W	240 W	DMX	170 mm	59 mm	30 mm
18154000	1 W	240 W	1-10 V	170 mm	59 mm	30 mm
18161000	1 W	240 W	KNX	72 mm	90 mm	70 mm
18162000	1 W	240 W	DALI-DT6	54 mm	110 mm	66 mm
18164000	1 W	240 W	1-10 V	54 mm	110 mm	66 mm
17528000	120 W	240 W	Wireless technology control			
17511000	120 W	240 W	Wireless technology control		46.5 mm	145 mm
18157000	1 W	240 W	ZigBee	145 mm	46.5 mm	16 mm
18192000	1 W	240 W	Wireless technology control	160 mm	45 mm	18 mm



QUALITYFLEX ONE TRINITY LED flexible strip, 5 m, CRI > 90, 5 W or 9 W or 12 W / m, IP00
Article no. 38233027

Compatible Profiles				
Short description				
Recessed profile 53654070				
LED recessed profile 53759070				
Wall recessed profile 53650260				
Plaster profile 53655070				
Plaster profile 53656070				
Surface-mounted profile 53600070				
Surface-mounted profile 53602070				
Surface-mounted profile 53603070				
LED surface-mounted profile 53606070				
Surface-mounted profile 53607080				
Surface-mounted profile, flat 53380261				
Surface-mounted profile, high 53381302				
Surface-mounted corner profile 53700070				
Surface-mounted corner profile 53702070				
Surface-mounted corner profile 53703260				
Surface-mounted corner profile 53385261				
Flexible profile 53753260				
Wall surface-mounted profile 53754070				
Wall surface-mounted profile 53751260				
Flat profile P76-16 53756070				
Surface-mounted round profile 53760260				