



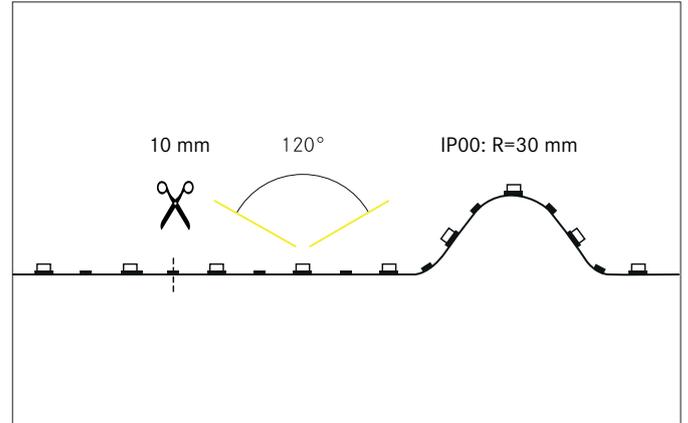

QUALITYFLEX Individual LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00
 Article no. 15506003

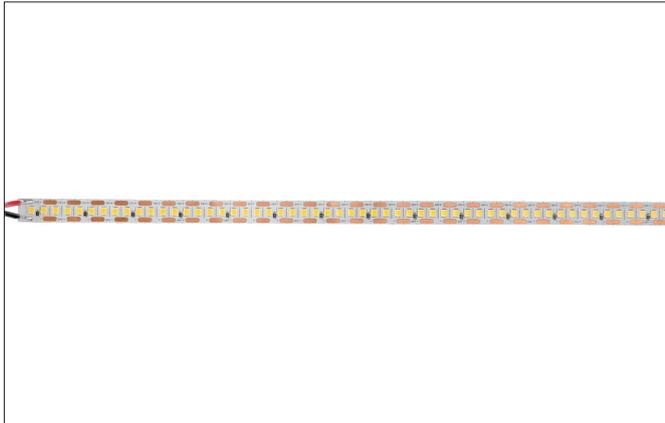

Tender
 LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00, white, Light colour: white, 3.000K, CRI > 80. Length: 8000 mm . Lamp power per meter: 9.6 W/m, Luminous flux per meter: 1400.0 lm/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 200 LEDs per meter, Chip distance (Short Pitch) : 5mm. For individual application, the LED flex board can be used all 10 mm be cut back. The maximum system length of 8.000 mm must not be exceeded with one feed-in.

Product Benefits

- Divisible every 10 mm.
- Suitable for indoor applications (IP00).
- Decorative illumination of furniture, objects and light covers.
- Flexible installation in profiles due to small pitch.
- Length 8,000 mm with one feed.
- Available in 2,700 K, 3,000 K and 4,000 K.
- Dimmable with corresponding accessories.


QUALITYFLEX Individual LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00

Article no. 15506003

Article data	
Article no.	15506003
GTIN	4255752525301
Series name	QUALITYFLEX Individual
Short description	LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00
Colour	white
Length	8,000 mm
Width	10 mm
Hight	1.5 mm
Scope of delivery	incl. 1 x assembly instructions, 5 x identification labels
Weight	0.185 kg
Length of the connection line	150 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Luminous flux per meter	1,400 lm/m
System efficiency	146 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle	120°
Adjustable color temperature	No

Operating technology of the luminaire	
System output	76.8 W
Lamp power per meter	9.6 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP00
Ambient temperature	-10°C up to +40°C
Dimmable	Yes
Wire number	2
Control	Depending on driver
Length of the connection line	150 mm
Cable assignment	red = + pole black = - pole
Design of the connecting cable	one-sided
Bulb change possible	No
Rated life time L80/B10 at 25 °C	50.000 h

Operating technology of QualityFlex	
Power per meter	9.6 W/m
Short Pitch	5 mm
Number of lamps per meter	200 Qty
Length of individual sections	10 mm
Smallest bend radius	30 mm
Length	8,000 mm
Maximum module length	8,000 mm
Circuit type	Parallel conduction
LED Type	2835 LED


QUALITYFLEX Individual LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00

Article no. 15506003

Packing data	
Gross weight	0.207 kg
Length of packaging	240 mm
Packaging width	215 mm
Packaging height	15 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Compatible Driver						
Article no.		Power	Control	Length	Width	Height
17206000	1 W	20 W	1-10 V	146 mm	55 mm	19 mm
17207000	1 W	30 W	on/off	160 mm	50 mm	22 mm
17214000	1 W	7.2 W	on/off	68 mm	35 mm	21 mm
17223000	1 W	75 W	on/off	185 mm	60 mm	31 mm
17224000	1 W	100 W	on/off	199 mm	63 mm	36 mm
17225000	1 W	150 W	on/off	219 mm	63 mm	36 mm
17226000	1 W	240 W	on/off	244 mm	71 mm	38 mm
17227000	1 W	320 W	on/off	252 mm	90 mm	44 mm
17228000	1 W	480 W	on/off	262 mm	125 mm	44 mm
17230000	5 W	30 W	Trailing-edge phase	145 mm	50 mm	22 mm
17231000	12 W	75 W	Trailing-edge phase	185 mm	60 mm	31 mm
17232000	12 W	120 W	Trailing-edge phase	223 mm	64 mm	32 mm
17340000	1.5 W	30 W	on/off	135 mm	36 mm	25 mm
17341000	3 W	60 W	on/off	151.5 mm	40.2 mm	31 mm
17342000	6 W	120 W	on/off	253.2 mm	42.5 mm	31 mm
17343000	7.5 W	150 W	on/off	253.2 mm	42.5 mm	31 mm
17250000	1 W	45 W	DALI-2	187 mm	45 mm	31 mm
17251000	1 W	80 W	DALI-2	290 mm	45 mm	31 mm
17252000	1 W	150 W	DALI-2	290 mm	45 mm	31 mm
17260000	1 W	150 W	on/off	105 mm	90 mm	59 mm

Compatible Controller						
Article no.		Power	Control	Length	Width	Height
17502000	1 W	120 W	DALI	183 mm	33 mm	23 mm
18151000	1 W	240 W	KNX	170 mm	59 mm	30 mm
18152000	1 W	240 W	DALI-DT6	170 mm	59 mm	30 mm
18153000	1 W	240 W	DMX	170 mm	59 mm	30 mm
18154000	1 W	240 W	1-10 V	170 mm	59 mm	30 mm
18161000	1 W	240 W	KNX	72 mm	90 mm	70 mm
18162000	1 W	240 W	DALI-DT6	54 mm	110 mm	66 mm
18164000	1 W	240 W	1-10 V	54 mm	110 mm	66 mm
17528000	120 W	240 W	Wireless technology control	145 mm	46.5 mm	16 mm
17511000	120 W	240 W	Wireless technology control	145 mm	46.5 mm	16 mm
18157000	1 W	240 W	ZigBee	145 mm	46.5 mm	16 mm
18192000	1 W	240 W	Wireless technology control	160 mm	45 mm	18 mm


QUALITYFLEX Individual LED flex board, 8 m, CRI > 80, 9.6 W / m, IP00

Article no. 15506003

Compatible Profiles				
Short description				
Recessed profile 53654070				
LED recessed profile 53759070				
Wall recessed profile 53650260				
Plaster profile 53655070				
Plaster profile 53656070				
Surface-mounted profile 53600070				
Surface-mounted profile 53602070				
Surface-mounted profile 53603070				
LED surface-mounted profile 53606070				
Surface-mounted profile 53607080				
Surface-mounted profile, flat 53380261				
Surface-mounted profile, high 53381302				
Surface-mounted corner profile 53700070				
Surface-mounted corner profile 53702070				
Surface-mounted corner profile 53703260				
Surface-mounted corner profile 53385261				
Flexible profile 53753260				
Wall surface-mounted profile 53754070				
Wall surface-mounted profile 53751260				
Flat profile P76-16 53756070				
Surface-mounted round profile 53760260				