



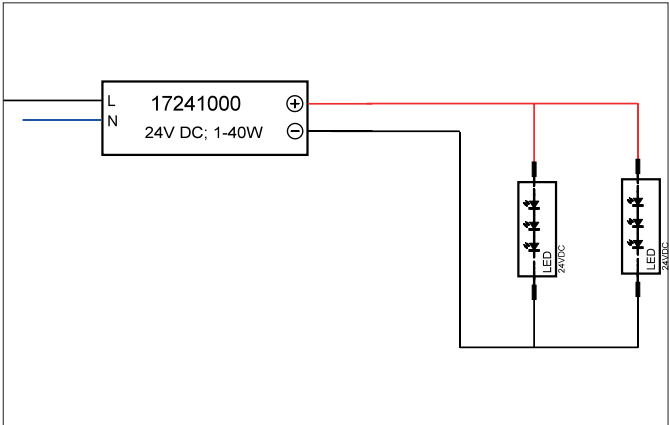

LED power supply 24 V DC, on/off switchable
Article no. 1724 1000

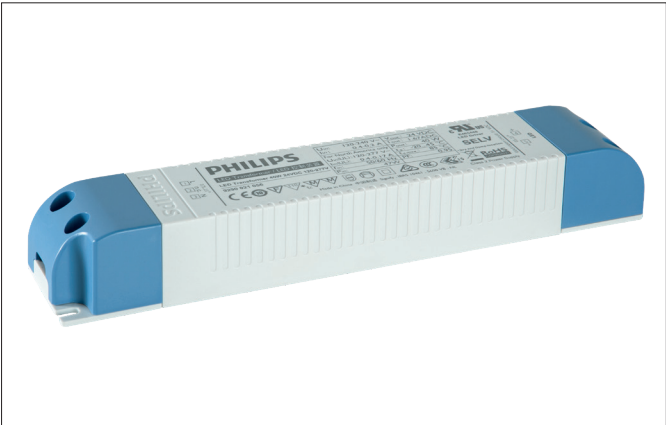

Tender
LED power supply 24 V DC, on/off switchable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 40 W, Dimmable: No, Type of dimming: on/off.

Article data	
Article no.	1724 1000
GTIN	4251433939054
Short description	LED power supply 24 V DC, on/off switchable
Material	Plastic
Colour	white
Shape	Rectangular
Length	210 mm
Width	40 mm
Hight	30 mm
Weight	0.261 kg
Conformance	CE


LED power supply 24 V DC, on/off switchable

Article no. 1724 1000

Operating technology of driver	
AC nominal voltage min	120 V
AC nominal voltage max	277 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power	1 W
Power max.	40 W
Output_ripple_current	2
Starting current	11,6 A, 180 µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Power factor	0.97
max. no. lights on B10 A	35
max. no. lights on B16 A	55
max. no. lights on C16 A	55
max. no. lights on C10 A	35
Output voltage max	25.20 V
Output voltage min.	22.80 V
Control	on/off
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	2
Environment temperature (ta)	-20 °C up to +45 °C
Measure point (tc)	max. +85 °C
Average nominal lifespan	50000 h
Output current	0,1 - 1670 mA

Packing data	
Gross weight	0.295 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	220 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.