



LED converter 700 mA, DALI dimmable (digital)

**Artikel-Nr. 17788020**

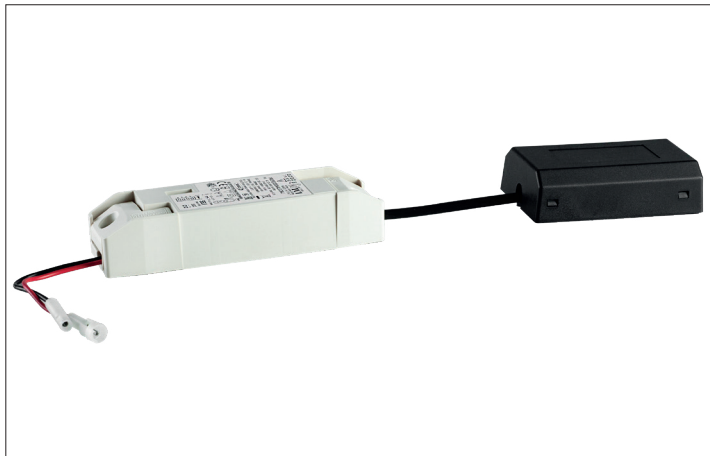

LED converter 700 mA, DALI dimmable (digital), This converter is equipped with safety devices which protect it against over-voltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 0.75-1.5 mm<sup>2</sup>. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz , Power: 38W, dimmable: Yes, Control: DALI-2 .

<b>Artikel-Nr.</b>	<b>17788020</b>
<b>Stand:</b>	06.12.2021 10:34

version	Plug&Play + Anschlussbox
Power	7-38 W
Current	700 mA
Control	DALI-2
range of dimming	1-100 %
Material	Plastic
Environment temperature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +85 °C
Power	7 - 38 W
Dimensions	L 146,5 x B 44 x H 30 mm
Input voltage	AC: 220-240 V, DC: 170-280 V

scope of delivery	Plug&Play version with 110 mm P&P output cable
Voltage	230V AC 50Hz
Current	700 mA
Circuit type	Series conduction
Degree of protection	IP20
Protection class	II
Voltage type	DC
Length	146.5 mm
Width	44 mm
Aufbauhöhe	30 mm