





LED recessed spot set, IP65, dimmable
Artikel-Nr. 39353023

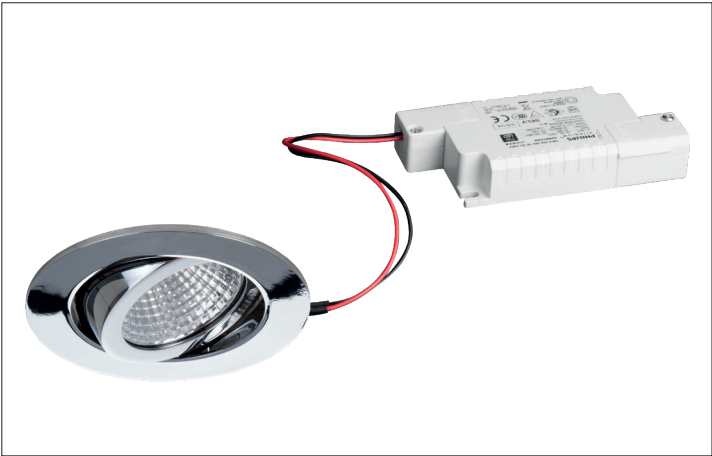

LED recessed spot set, IP65, dimmable, chrome, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Silicone rubber / Plastic, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 650lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, control: Trailing-edge phase.

Artikel-Nr.	39353023
Stand:	19.07.2021 22:15

Colour of light	3000 K	Outer diameter	82 mm
Colour	Chrome	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	50 mm
Amount of light sources / fittings	1 Qty	Voltage	230V AC 50Hz
Material	Aluminium / Steel / Silicone rubber / Plastic	Degree of protection	IP65
Power	6 W	Protection class	II
Lamp	LED	Adjustability	Pivoted
Colour rendering	CRI > 80	Swivel angle	30 °
control	Trailing-edge phase	Circuit type	Parallel conduction

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.